

# P-950P

## Pressure Transducer

### Hex22, Packard metri pack type

- Provides a high level output
- Superior Long term Stability
- Temperature Compensated
- Linear Amplified Output
- Excellent Repeatability & Hysteresis
- EMI/RFI Protection

P-950P Long term minimization of these errors is maintained after millions of full scale overpressure cycles, making electronic set point virtually drift-free. Use the sensing element or silicon MEMS strain gage elements glass bonded to stainless steel diaphragm and its mounting provides excellent resistance to most liquids and chemicals. Ruggedness and reliability are also enhanced by a stainless steel housing to resist corrosion pressure sealing for media compatibility is provided by selection of Non-welding Sealing type. metal sensing element contains and integral, reliable, solid state, custom ASIC. This circuit is digital interface can be used for a simple PC-controlled calibration procedure, in order to program a set of calibration coefficients into an on-chip EEPROM and without the cost overhead.



P-950P


### TYPICAL APPLICATIONS

- ✓ Process control
- ✓ Pneumatic and hydraulic controls
- ✓ Pump and compressors
- ✓ Agricultural technology
- ✓ Environmental control systems

### General SPEC

Characteristic	P-950PA	P-950PV
Output	4~20mA	0.5~4.5V / 0~5V / 1~5V
Power Supply	8~30VDC	5V, 8~30VDC
Electric connection	Hex22, Packard Metri pack connector	
Pressure Range	0~50 / 0~100 / 0~200 / 0~250 / 0~400 / 0~500 [bar]	
Operating Temp. Range	-40 to 125°C	
Compensated Temp. Range	-20 to 80°C	
Accuracy	≤ ±0.5%F.S [Typical/25°C ]	
Total Error band	±1.5 %F.S [Typical] / ±2.0 %F.S [MAX]	
Hysteresis and repeatability	±0.1 %F.S [Typical] / ±0.15%F.S [MAX]	
Process connection	R1/4" , G1/4" , 9/16-18UNF, G3/8"	
Wetted Port material	SUS630	
Body material	SUS304	
Electric connection material	PA66 + GF30 gold plated Pin	
Enclosure	IP67	
Over Pressure / Burst Pressure	2 x F.S. / 10 x F.S.	
Response time 10~90%	≤2ms	
Withstand voltage	500V AC (1minutes between case and all terminals tied)	
Insulation resistance	Greater than 100MΩ (20V DC between case and all terminals tied)	
Mechanical life cycle	5,000,000/cycle	
Circuit protection	Reverse polarity protected. (Power supply +/-)	
Shock proof	1000m/s <sup>2</sup> (6ms or less, X, Y, Z 3times for each at constant temp.)	
Vibration proof	200m/s <sup>2</sup> (10~2000Hz, X:4h, Y:2h, Z:2h at constant temp.)	
Weight	40g	


## Dimensions (mm)

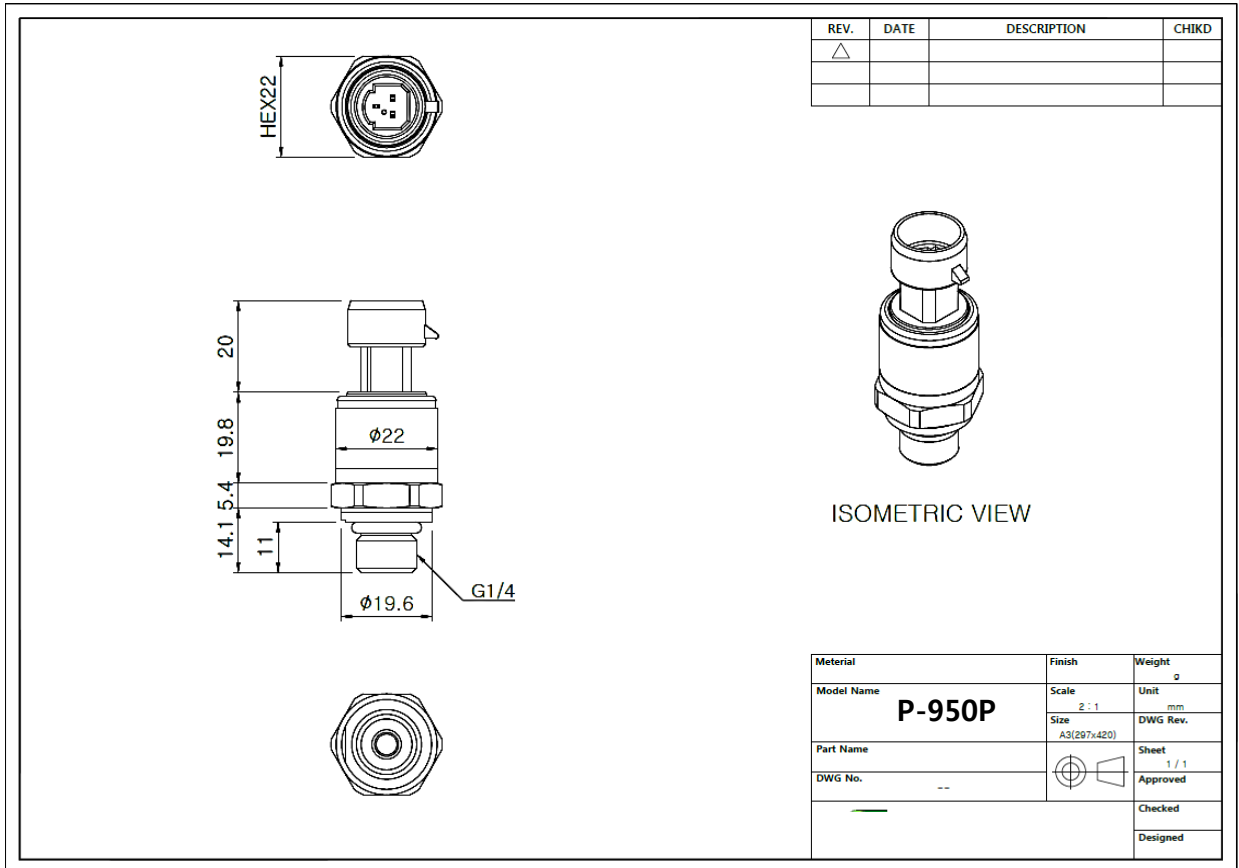

## Description

### ELECTRONICAL CONNECTIONS ;

※ Connection type : Packard Metri pack connector

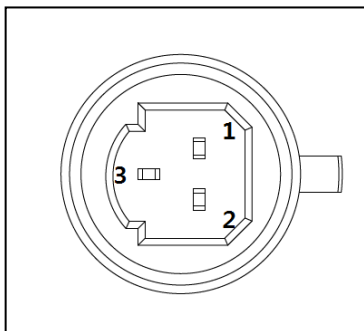

P-950PA			P-950PV		
No.	Description	Wire color	No.	Description	Wire color
1	POWER(-)	Black	1	POWER(+)	Red
2	POWER(+)	Red	2	GND	Black
3	-	-	3	OUTPUT	Green

## How to order

**P - 950**                           

<b>0) Connector Type</b>							
Hex22, Packard Metri pack connector	P						
<b>1) Output signal</b>							
4~20mA -----	A						
0~5V -----	V0						
1~5V -----	V1						
0.5~4.5V (ratiometric) -----	V2						
Other on request -----	Z						
<b>2) Supply Voltage</b>							
5 VDC -----	5						
8~30 VDC -----	8						
Other on request -----	Z						
<b>3) Pressure range</b>							
0 to 50 bar -----	50						
0 to 100 bar -----	100						
0 to 200 bar -----	200						
0 to 250 bar -----	250						
0 to 400 bar -----	400						
0 to 500 bar -----	500						
Other on request -----	Z						
<b>4) Process connection</b>							
R1/4" (PT1/4" ) -----	R4						
G1/4" (PF1/4" ) -----	G4						
G3/8" (PF3/8" ) -----	G8						
9/16-18UNF -----	U						
Other on request -----	Z						
<b>5) Seal material</b>							
Silicone -----	S						
NBR -----	N						
Viton -----	V						
Other on request -----	Z						